

Automated geoacoustic inversion and uncertainty: Meso-scale seabed variability in shallow water environments

Jan Dettmer (PI)

School of Earth and Ocean Sciences, University of Victoria, Victoria BC Canada
phone: (250) 472-4342 email: jand@uvic.ca

Stan E. Dosso

School of Earth and Ocean Sciences, University of Victoria, Victoria BC Canada
Tel: (250) 472-4341 email: sdosso@uvic.ca

Charles W. Holland

Pennsylvania State University, Applied Research Laboratory, State College PA
Tel: (814) 865-1724 email: holland-cw@psu.edu

Grant Number: N000140910394

LONG-TERM GOALS

Propagation and reverberation of acoustic fields in shallow water depend strongly on the spatial variability of seabed geoacoustic parameters, and lack of knowledge of seabed variability is often a limiting factor in acoustic modeling applications. However, direct sampling (e.g., coring) of vertical and lateral variability is expensive and laborious, and long-range inversion methods can fail to provide sufficient resolution. For proper quantitative examination of variability, parameter uncertainty must be quantified first which can be particularly challenging for large data sets, and in range-dependent and/or dispersive seabed environments. A long-term goal of this work is to substantially advance Bayesian inversion methodology to allow automated analysis of large and complex data sets. These advances will allow mesoscale spatial variability of seabed sediments to be quantified in two and three dimensions.

In addition, more detailed understanding of acoustic propagation in porous sediments is desirable. For example, understanding acoustic dispersion in seabed sediments is of significant interest to the acoustical oceanography community. Inferring such complex quantities from acoustic measurements also requires a higher level of sophistication in modeling the seabed, for example by accounting for shear and scattering in arbitrarily layered seabeds. Obtaining meaningful inferences on low-frequency dispersion is a challenging inverse problem since estimates can strongly depend on the spatial structure (layering) of the sediment and multiple competing physical theories exist that can predict similar dispersion regimes. Further, direct sampling is currently not possible for low frequencies (hundreds of Hertz). Recent advances in Bayesian inversion (Dettmer et al. 2010, 2012a; Dettmer and Dosso 2013; Holland and Dettmer 2012) allow inferences on complex environments (arbitrary and unknown layering) and advanced physical theories (acoustics of dispersive media and spherical reflection

Report Documentation Page				Form Approved OMB No. 0704-0188	
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE 30 SEP 2013		2. REPORT TYPE		3. DATES COVERED 00-00-2013 to 00-00-2013	
4. TITLE AND SUBTITLE Automated geoacoustic inversion and uncertainty: Meso-scale seabed variability in shallow water environments				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) University of Victoria,School of Earth and Ocean Sciences,3800 Finnerty Road,Victoria, BC Canada V8P5C2,				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited					
13. SUPPLEMENTARY NOTES					
14. ABSTRACT					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT Same as Report (SAR)	18. NUMBER OF PAGES 11	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

coefficients). A long-term goal is to further understanding of such complex systems and develop a quantitative methodology for understanding and discrimination of physical dispersion theories.

OBJECTIVES

The objective of this research proposal is to carry out geoacoustic inversions in 2D and 3D shallow-water environments. In particular, highly-informative data which reduce/eliminate oceanographic effects will be considered. The resulting geoacoustic models will represent benchmarks for meso-scale variability and uncertainty estimation, and also allow the study of compressional- and shear-wave dispersion and attenuation-frequency dependence. Bayesian hierarchical models and trans-dimensional (trans-D) inversions allow for increasingly automated data analysis in challenging shallow-water environments. The problems will initially be studied with existing data from a Mediterranean Sea test bed. Studies will then be extended to new data from upcoming shallow-water experiments, when available. Particular focus for new shallow-water data will be on rigorous variability and uncertainty estimation, attenuation-frequency dependence, sound-velocity dispersion, and shear-wave velocity structure of the seabed.

APPROACH

Quantifying parameter uncertainty in geoacoustic inversion is achieved here with probabilistic sampling methods (MacKay 2003). Probabilistic uncertainty estimation requires assigning a model which is defined here to include the physical theory describing signal-system interaction, an appropriate parametrization, and a statistical representation of residual errors (the difference between predictions and observations). This model specification constitutes prior information that fundamentally impacts uncertainty estimates. In particular, choosing a model parametrization that is consistent with the resolving power of the data and specifying a statistical description of residual errors are important inter-dependent components which are considered here.

Parametrization and discretization choices strongly influence how well predictions fit observations which can strongly impact uncertainty estimates. Hence, objective model selection is required to obtain meaningful uncertainty estimates. Here, trans-D inference is used to relax model specification from a single parametrization to groups of reasonable parametrizations. Such hierarchical Bayesian models require much less subjective input/choice and can be used for uncertainty estimation with advanced trans-D sampling algorithms (Dettmer et al. 2010).

A significant challenge in trans-D inversion is addressing dependence in residual errors that often arise due to intrinsically correlated noise and the limited ability of the model to capture the full extent of environment complexity for data with high information content. Bayesian inference requires that a statistical distribution form is assumed for residuals (e.g., Gaussian). However, the parameters of the distribution (variances and covariances) can be estimated as part of a hierarchical model (Dettmer et al. 2012) which is particularly useful for trans-D algorithms. Hierarchical estimation of these parameters impacts uncertainties and can influence model selection when dependence is significant (Dettmer and Dosso 2012). In particular, covariance parameters can be estimated efficiently by modeling residual-error distributions as autoregressive processes.

Many trans-D algorithms are based on reversible jump Markov-chain Monte Carlo (rjMCMC) sampling (Green 1995), where jumps between sub-spaces are implemented using steps that create or

delete structure (e.g., sediment layers). Designing efficient proposals for jump steps is extremely challenging, which results in rare acceptance (causing prohibitively-long convergence times). Population MCMC methods improve convergence rates for highly challenging non-linear problems with many posterior modes and strongly correlated parameters (Liu 2001), and have also been applied in rjMCMC resulting in much higher acceptance of jumps and improved chain mixing within dimensions (Jasra et al. 2007; Dettmer and Dosso 2012). Population rjMCMC is developed and applied for geoacoustic inverse problems in this project, providing the ability to carry out uncertainty estimation for highly complex geoacoustic inference problems.

WORK COMPLETED

Initial work has focused on advancing trans-D sampling algorithms to study complex geoacoustic inference problems, and in particular dispersive sediments (Holland and Dettmer 2013; Dettmer et al. 2012). The new algorithms have been applied to successfully study acoustic dispersion and attenuation-frequency dependence at three experiment sites on the Malta Plateau. To improve computational efficiency, plane- and spherical-wave reflection-coefficient models were implemented on graphics processing units (GPU) using the compute unified device architecture in Fortran. The GPU implementation resulted in ~ 2 orders of magnitude speed up for the plane-wave and spherical-wave models. Further, the rjMCMC algorithm was implemented for matched-field inversion (Dettmer and Dosso 2012). More recently, the GPU spherical-wave reflection coefficient model was generalized to account for shear in arbitrarily layered media. This advancement gives the capability to infer acoustic dispersion in the presence of shear waves in the sediment. Our 170 core high performance compute cluster has been extensively used to support this research. The cluster is jointly funded by ONR and the Natural Sciences and Engineering Research Council (NSERC) of Canada. Several of the inversion algorithms for this project have been developed to take full advantage of the massively parallel architecture of the cluster. In addition, 4 low-cost GPU nodes were added to the compute abilities that, together with new GPU algorithms, result in a substantial increase of computational power.

RESULTS

Results presented in this section focus on some of the research carried out this year to develop a new approach to studying acoustic dispersion in seabed sediments and a new approach to matched-field inversion. A complete account is presented in Holland and Dettmer (2013), Dettmer et al. (2012), and Dettmer and Dosso (2012).

Trans-D inversion is applied to data from *in-situ* sediments on the Malta Plateau (Site 2, see Fig. 1) to study dispersion and attenuation-frequency dependence. Reflection measurements were carried out during the SCARAB98 experiment in 153 m water depth. The reflection measurements were processed to yield reflection-coefficient data as a function of frequency and angle for the uppermost 4 m of sediment. Reflection-coefficient predictions were carried out using Buckingham's viscous grain shearing (VGS) theory (Buckingham 2007), which obeys causality and predicts velocity-dispersion and attenuation-frequency curves.

Figure 2 shows marginal profile distributions of four VGS parameters that were sampled as a function of depth. These marginal distributions are derived from the posterior density which constitutes the solution to the probabilistic inverse problem. This section shows several results that are obtained from the posterior by marginalizing in various ways. Several other parameters of VGS theory were fixed at

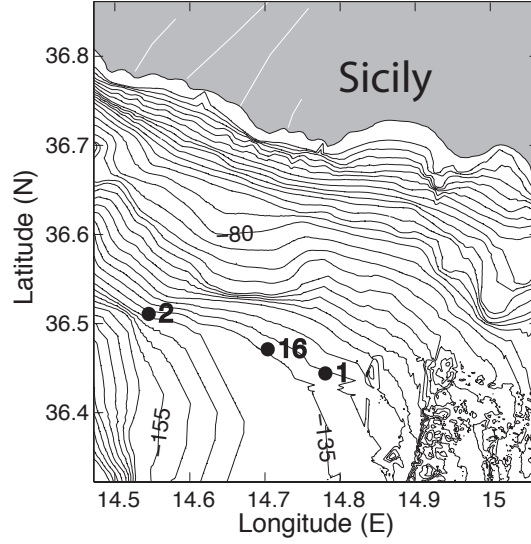


Figure 1: Site locations on the Malta Plateau for dispersion studies.

measured *in-situ* values (obtained from a CTD cast) in the inversion. Figure 2 shows that porosity is the most sensitive parameter, while strain hardening is the least sensitive. The time constant τ governs transition between viscous and frictional losses. Viscous losses dominate for small τ values, resulting in attenuation-frequency dependence proportional to f^2 at low frequencies and proportional to $f^{1/2}$ at higher frequencies. For large values ($\tau \gtrsim \exp(-5)$) friction dominates and attenuation-frequency dependence for the frequency range considered here is proportional to f^1 : The inversion is largely insensitive to τ . Hence, Fig. 2 shows the important result that the inversion is able to discriminate between two dispersion regimes. To 2.7-m depth friction losses dominate, while viscous losses dominate below that depth.

Figure 3 shows the inversion results in terms of geoacoustic parameters which are derived from the VGS parameters. Note that VGS theory provides velocity and attenuation as a function of frequency, and results for 1400 Hz are shown. The inversion results agree very closely with estimates from independent cores taken at the experiment site. Posterior inferences can also be obtained for dispersion curves which are shown for selected depths in Fig. 4.

Inversions were also carried out for two other locations (Sites 1 and 16, see Fig. 1) and the results are shown in Figs. 5 and 6. Note the very close agreement between inversion and core estimates. In addition, velocity-marginal profiles extrapolated to 200 kHz (the frequency of velocity measurements on the core) are shown.

Currently, the effects of shear-waves on velocity dispersion and attenuation-frequency dependence are under investigation. While effects due to weak shear on inversion results are unlikely to strongly impact compressional-wave velocity and density estimates, attenuation estimates may change significantly: When shear effects are ignored, the energy contained in shear-waves can be modeled as a loss mechanism for compressional waves in the data predictions. This results in increased attenuation estimates from the inversion which are often referred to as *effective* rather than *intrinsic* attenuation estimates. However, recent interest in attenuation estimation in the ocean acoustics community has focused on inferring intrinsic attenuation. Intrinsic attenuation is estimated here by including shear

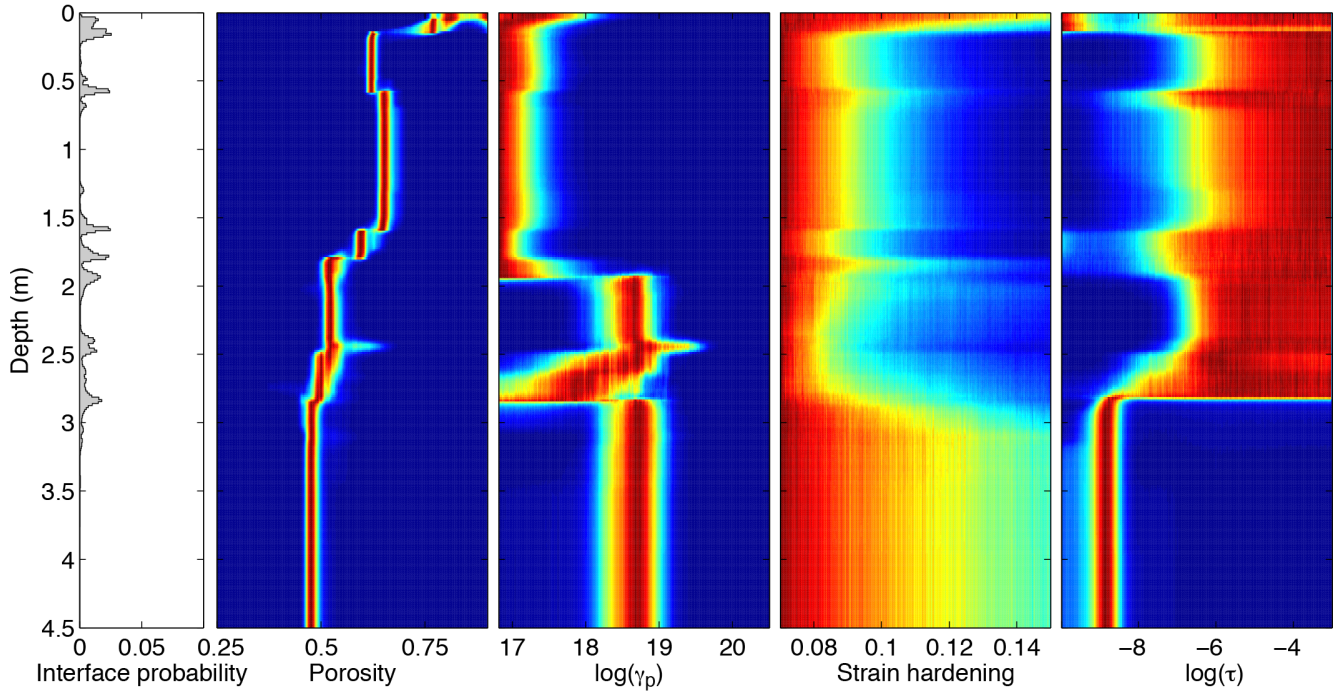


Figure 2: Site 2 marginal profile distributions of VGS parameters and interface probability.

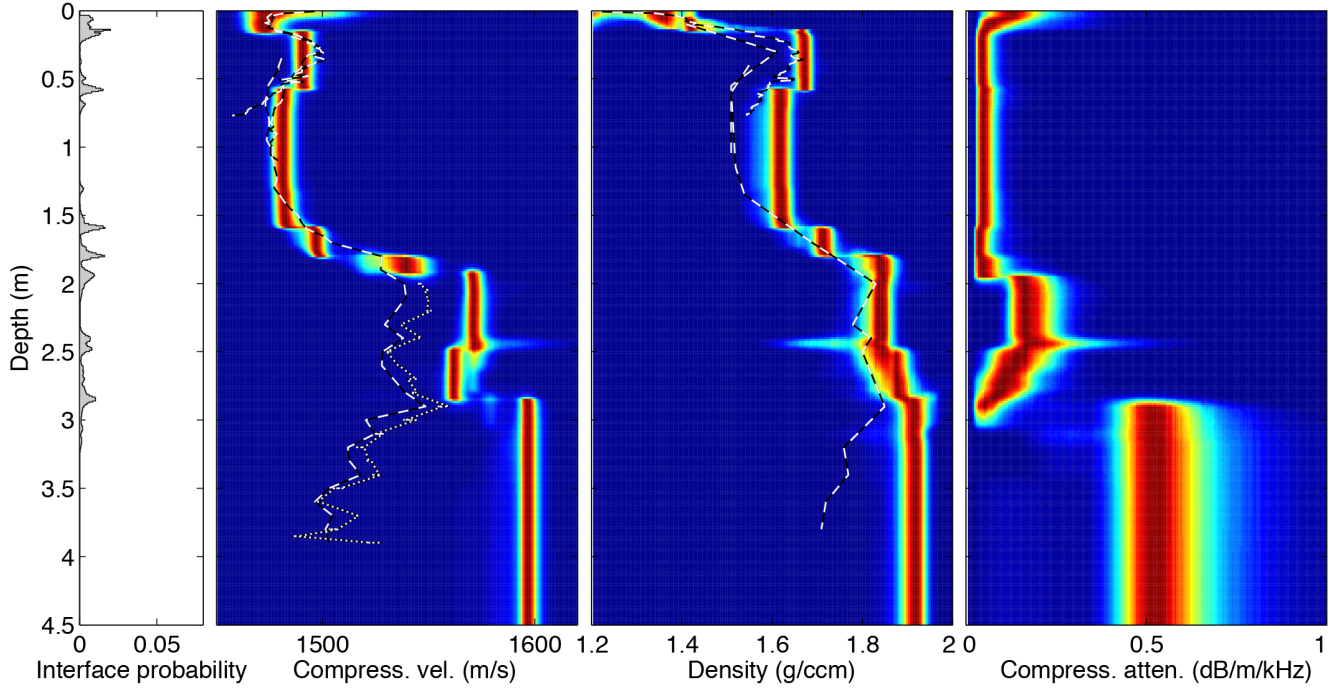


Figure 3: Marginal profile distributions for geoaoustic parameters, derived from the VGS parameters in Fig. 2. Estimates from independent core samples are shown as dashed lines.

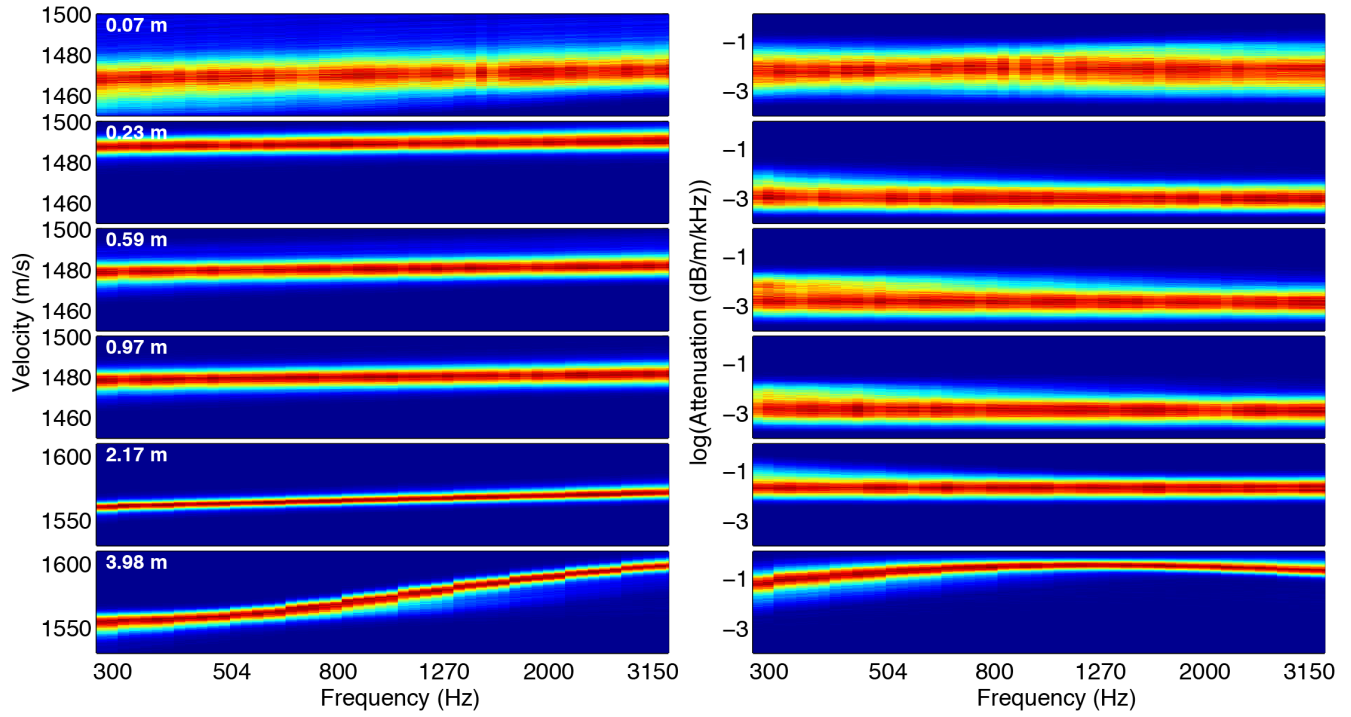


Figure 4: Velocity-dispersion and attenuation-frequency curves for select depths (Site 2).

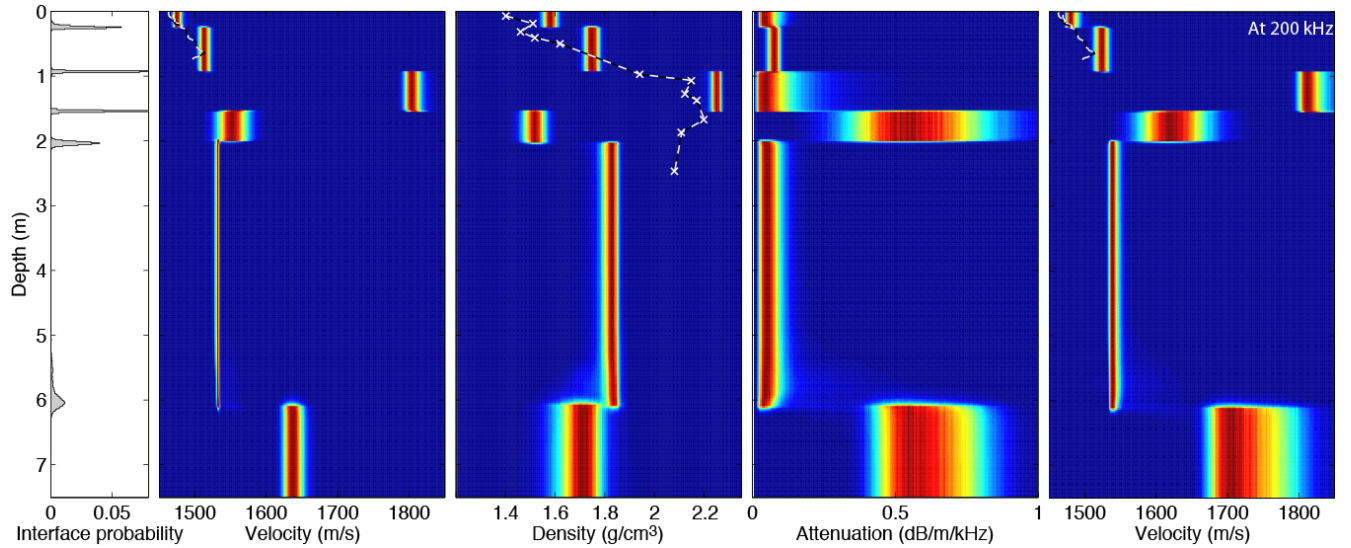


Figure 5: Marginal profile distributions for geoaoustic parameters, derived from VGS parameters (Site 1). Estimates from independent core samples are shown as dashed lines.

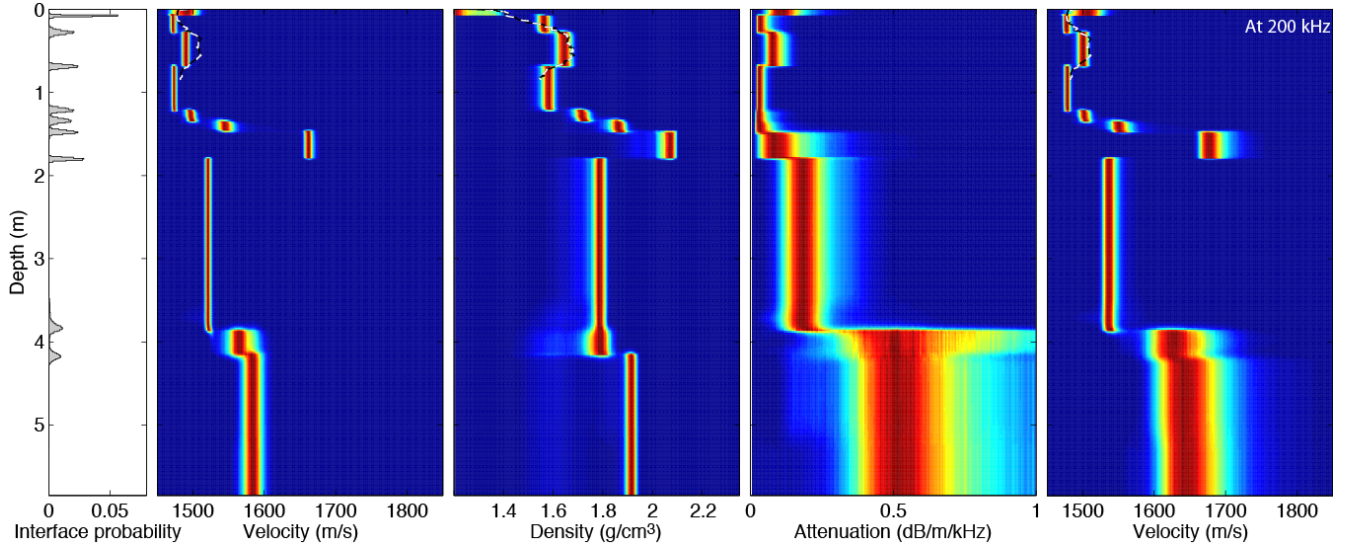


Figure 6: Marginal profile distributions for geoaoustic parameters, derived from VGS parameters (Site 16). Estimates from independent core samples are shown as dashed lines and sample locations for the sparse density core are marked by x.

effects for arbitrarily layered media in the reflection-coefficient inversion. Figure 7 shows preliminary results of this inversion. Note that compressional velocities and densities are similar to the estimates in Fig. 3. However, compressional-wave attenuation is an order of magnitude lower (note the logarithmic axis) and shows values (~ 0.01 dB/m/kHz) which are consistent with other observations (Hamilton 1980).

In addition to the work on reflection-coefficient inversions, a rigorous inversion approach was developed for matched-field inversion. In particular, the impact of correlated residual errors on trans-D inversion and on transmission-loss predictions was studied using the PROSIM'97 data set (Dettmer and Dosso 2012). Figure 8 shows inversion results for an inversion accounting for residual-error dependence using an autoregressive model, as well as results for an inversion that ignores residual-error dependence. Here, ignoring dependence leads to excessive model complexity which significantly impacts transmission-loss prediction uncertainty and bias (Fig. 9).

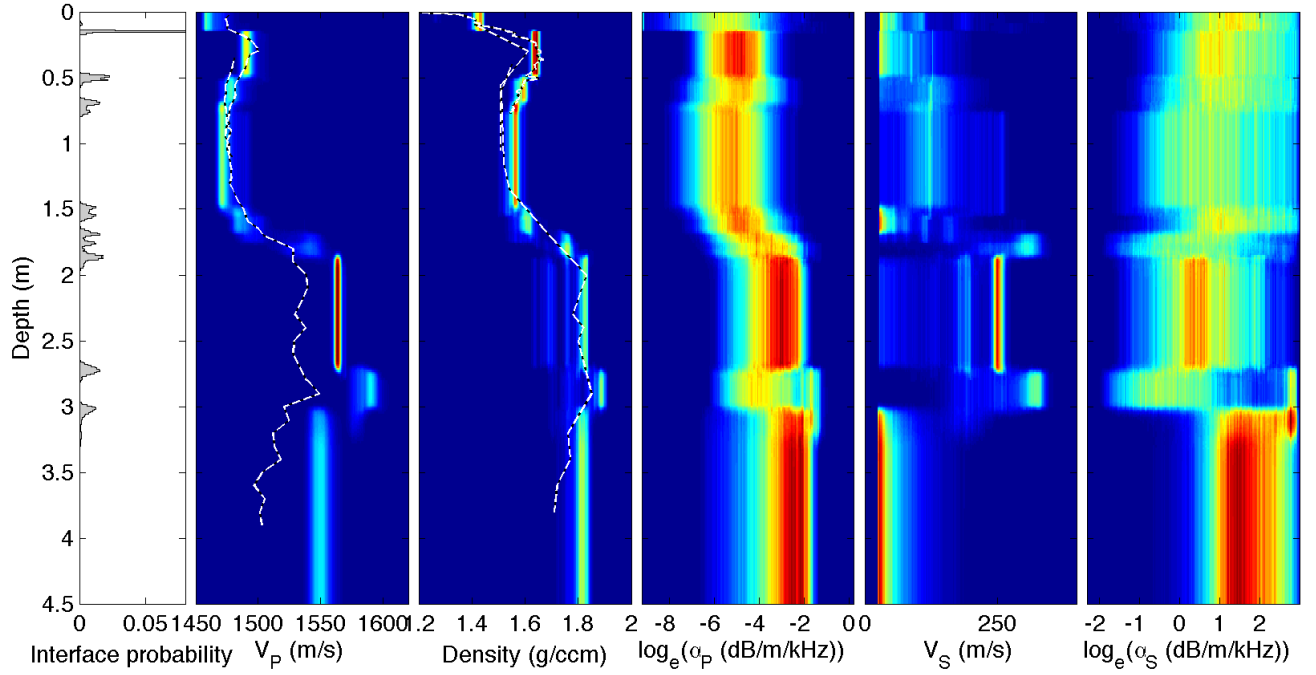


Figure 7: Elastic inversion results (including shear) derived from VGS parameters (Site 2). Estimates from independent core samples are shown as dashed lines.

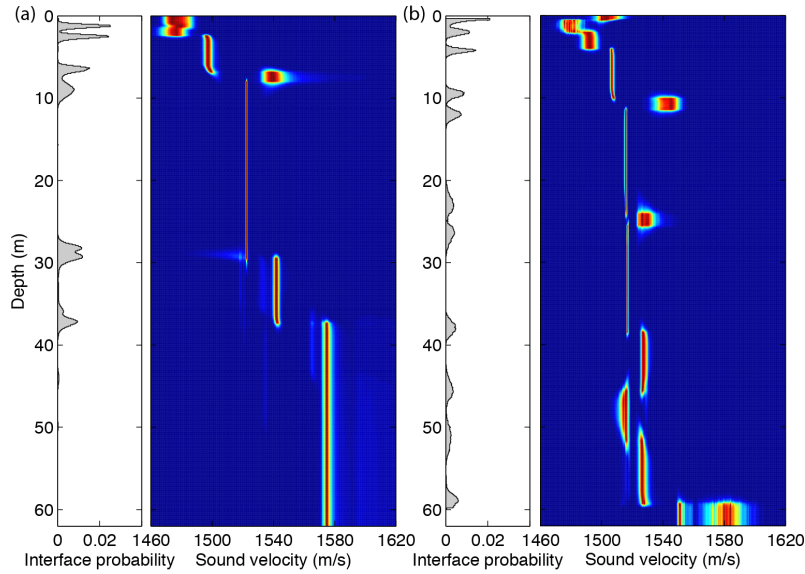


Figure 8: Comparison of trans-D MFI inversion results (a) accounting for correlated errors and (b) ignoring correlated errors.

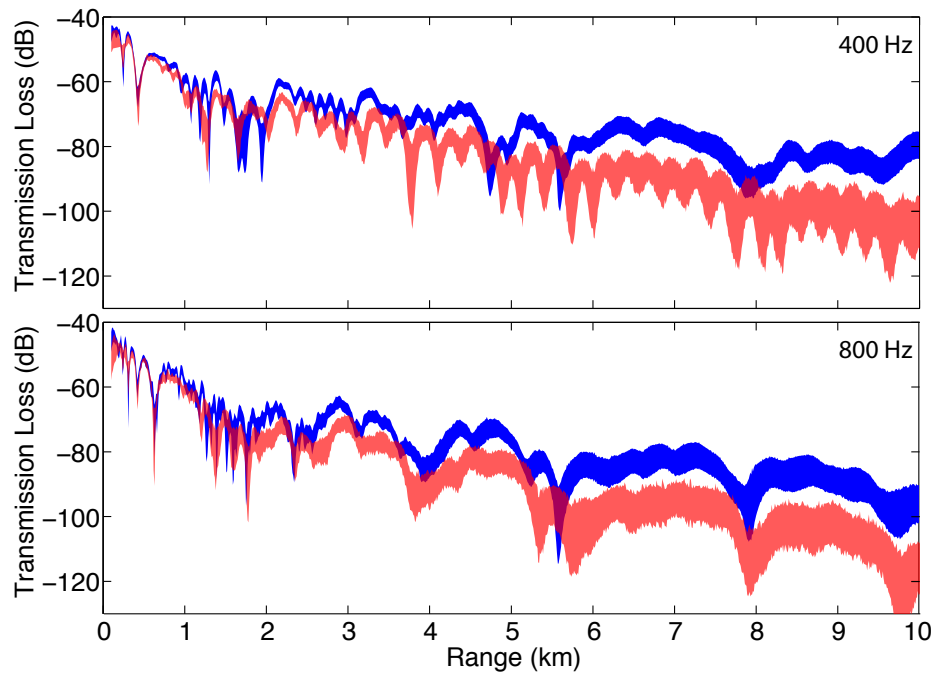


Figure 9: *Transmission-loss prediction uncertainty at 400 and 800 Hz for inversions ignoring (red) and accounting for (blue) residual-error dependence.*

IMPACT/APPLICATIONS

The ability to obtain *in-situ* seabed parameter estimates remotely (i.e., without direct sampling) has important geoscience implications (e.g., understanding sediment processes) and in some cases can be the only feasible way of obtaining such inferences (e.g., low-frequency dispersion). Further, variability estimates for seabed parameters are important for understanding the physics of acoustic-seabed interaction. Since variability can only be estimated if uncertainties are understood, uncertainty estimation is crucial. Important applications also include improved Navy databases (for ASW and MCM), as well as many commercial applications (pipeline or cable laying). A particular strength of this work is rigorous geoacoustic uncertainty estimation. These geoacoustic uncertainty models impact reliability and quality of transmission loss prediction.

RELATED PROJECTS

- Broadband Clutter JRP project (NURC, ARL-PSU, DRDC-A, NRL)
- Dosso’s NSERC Discovery Grant “Geoacoustic Inversion” (2009-2014) at the University of Victoria: Dosso and Dettmer work closely together on advancing Bayesian inference applications.
- “Bayesian ambient noise inversion for geoacoustic uncertainty estimation” (2011–2012, Jorge Quijano ONR Postdoctoral Fellowship N000141110214) (Quijano et al. 2012ab): Quijano uses and further develops several algorithms that originated from Dettmer’s work.
- “Bayesian inversion of seabed scattering data” (2011–2013, Gavin Steininger ONR PhD)

Fellowship N00014110213): Steininger uses and furthers several algorithms that originated from Dettmer's work. Dettmer is on Steininger's PhD supervisory committee.

REFERENCES

- J. Dettmer, S. E. Dosso, and C. W. Holland. Trans-dimensional geoacoustic inversion. *J. Acoust. Soc. Am.*, 128:3393–3405, 2010.
- J. Dettmer, S. Molnar, G. A. M. W. Steininger, S. E. Dosso, and J. F. Cassidy. Trans-dimensional inversion of microtremor array dispersion data with hierarchical autoregressive error models. *Geophys. J. Int.*, 188:719–734, 2012.
- J. Dettmer and S. E. Dosso. Probabilistic two-dimensional water-column and seabed inversion with self-adapting parameterizations. *J. Acoust. Soc. Am.*, 133:2612–2623, 2013.
- C. W. Holland and J. Dettmer. *in-situ* sediment dispersion estimates in the presence of discrete layers and gradients. *J. Acoust. Soc. Am.*, 133:50–61, 2013.
- D. J. C. MacKay. *Information Theory, Inference, and Learning Algorithms*, pages 343–386. Cambridge University Press, Cambridge, 2003.
- J. Dettmer and S. E. Dosso. Trans-dimensional matched-field geoacoustic inversion with hierarchical error models and interacting Markov chains. *J. Acoust. Soc. Am.*, 132:2239–2250, 2012.
- P. J. Green. Reversible jump Markov chain Monte Carlo computation and Bayesian model determination. *Biometrika*, 82:711–732, 1995.
- J. S. Liu. *Monte Carlo Strategies in Scientific Computing*, pages 1–343. Springer, New York, 2001.
- A. Jasra, D. A. Stephens, and C. C. Holmes. Population-based reversible jump Markov chain Monte Carlo. *Biometrika*, 94:787–807, 2007.
- M. J. Buckingham. On pore fluid viscosity and the wave properties of saturated granular materials including marine sediments. *J. Acoust. Soc. Am.*, 122:1486–1501, 2007.
- E. L. Hamilton. Geoacoustic modeling of the sea floor. *J. Acoust. Soc. Am.*, 68:1313–1340, 1980.
- J. E. Quijano, S. E. Dosso, J. Dettmer, L. M. Zurk, M. Siderius, and C. Harrison. Bayesian geoacoustic inversion using wind-driven ambient noise. *J. Acoust. Soc. Am.*, 131:2658–2667, 2012a.
- J. E. Quijano, S. E. Dosso, J. Dettmer, L. M. Zurk, M. Siderius, and C. Harrison. Trans-dimensional geoacoustic inversion of wind-driven ambient noise. *J. Acoust. Soc. Am.*, 133:EL47–EL53, 2012b.

PUBLICATIONS

8. G. A. M. W. Steininger, S. E. Dosso, C. W. Holland, and J. Dettmer. A trans-dimensional polynomial-spline parameterization for gradient-based geoacoustic inversion. *J. Acoust. Soc. Am.*, 2013 [submitted, refereed].
7. G. A. M. W. Steininger, C. W. Holland, S. E. Dosso, and J. Dettmer. Seabed roughness parameters from joint backscatter and reflection inversion at the Malta Plateau. *J. Acoust. Soc. Am.*, 134:1833–1842, 2013a [published, refereed].
6. J. Dettmer, C. W. Holland, and S. E. Dosso. Trans-dimensional uncertainty estimation for dispersive seabed sediments. *Geophysics*, 78:WB63–WB76, 2013 [published, refereed].
5. C. W. Holland and J. Dettmer. *in-situ* sediment dispersion estimates in the presence of discrete layers and gradients. *J. Acoust. Soc. Am.*, 133:50–61, 2013 [published, refereed].

4. G. A. M. W. Steininger, J. Dettmer, C. W. Holland, and S. E. Dosso. Trans-dimensional joint inversion of seabed scattering and reflection data. *J. Acoust. Soc. Am.*, 133:1347–1357, 2013b [published, refereed].
3. J. E. Quijano, S. E. Dosso, J. Dettmer, L. M. Zurk, M. Siderius, and C. Harrison. Trans-dimensional geoacoustic inversion of wind-driven ambient noise. *J. Acoust. Soc. Am.*, 133:EL47–EL53, 2012b [published, refereed].
2. J. Dettmer and S. E. Dosso. Trans-dimensional matched-field geoacoustic inversion with hierarchical error models and interacting Markov chains. *J. Acoust. Soc. Am.*, 132:2239–2250, 2012 [published, refereed].
1. C. W. Holland, P. L. Nielsen, J. Dettmer, and S. E. Dosso. Resolving meso-scale seabed variability using reflection measurements from an autonomous underwater vehicle. *J. Acoust. Soc. Am.*, 131:1066–1078, 2012 [published, refereed].
6. S. E. Dosso and J. Dettmer. Studying the sea with sound. *Proceedings of Meetings on Acoustics* 19, 070094 (2013) [published].
5. J. Dettmer and S. E. Dosso. Probabilistic two dimensional joint water-column and seabed inversion. *Proceedings of Meetings on Acoustics* 19, 055088 (2013) [published].
4. S. E. Dosso and J. Dettmer. Efficient Bayesian multi-source localization using a graphical processing unit. *Proceedings of Meetings on Acoustics* 19, 070095 (2013) [published].
3. J. Dettmer, S. E. Dosso, and C. W. Holland. Exploiting data parallelism and population Monte Carlo on massively-parallel architectures for geoacoustic inversion. *Proceedings of Meetings on Acoustics* 19, 070094 (2013) [published].
2. G. Steininger, S. E. Dosso, C. W. Holland, and J. Dettmer. Seabed roughness parameters for the malta plateau from joint backscatter and reflection inversion. *Proceedings of Meetings on Acoustics* 19, 070003 (2013) [published].
1. G. Steininger, J. Dettmer, C. W. Holland, and S. E. Dosso. Geoacoustic inversion via trans-dimensional sampling over seabed and error models. *Proceedings of Meetings on Acoustics* 19, 055092 (2013) [published].